


MATERIAL:	Aço Rápido (HSS)
DUREZA CABEÇA:	50 ± 5 HRC
DUREZA DE HASTE:	60 ± 2 HRC
MEDIDAS COMERCIAIS:	Medidas marcadas com a cor cinza

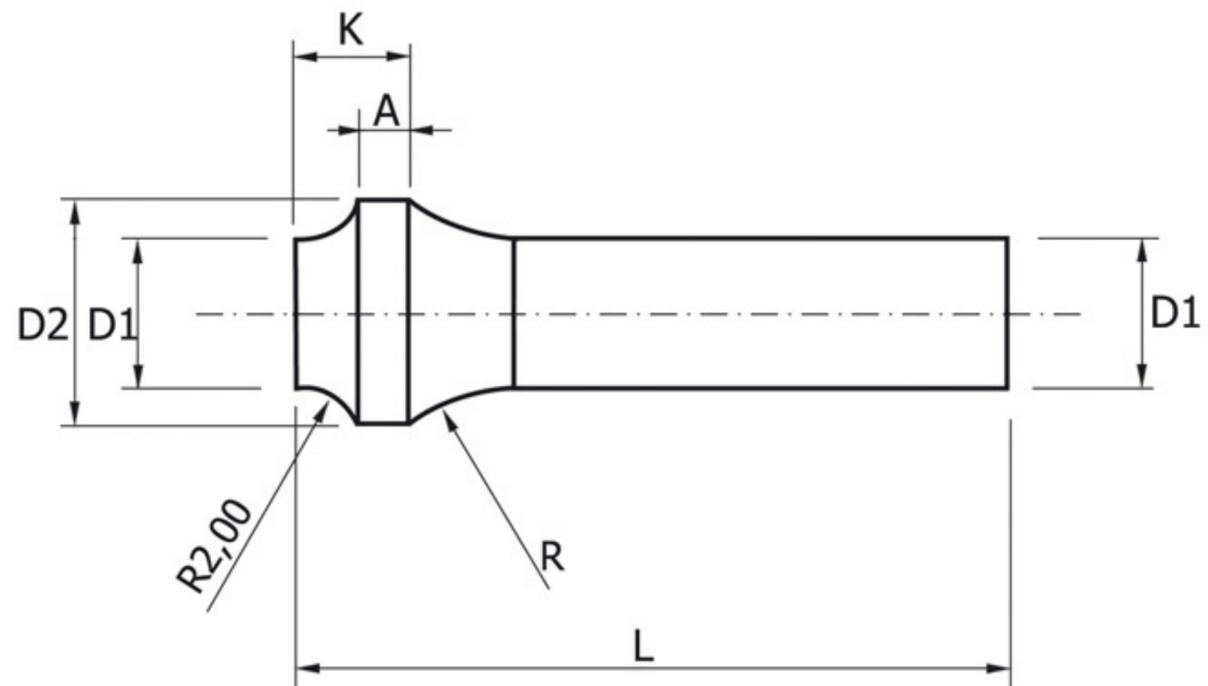

D1 (h6)	D2 -0,10	R -0,20	K +0,20	A Ref.	L +1,00
5,0	7,0	10,0	4,0	1,5	Especificação do usuário até 100mm
6,0	9,0				
7,0	10,0				
8,0	11,0	12,0			
9,0	13,0				
10,0	14,0	15,0			
11,0	15,0				
12,0	16,0				
13,0	17,0				
14,0	18,0				
15,0	19,0				
16,0	20,0				

Medidas especiais sob encomenda.